

DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1S R4W



NW 1/16




SEC 9

U.S.B.&M.

U-10

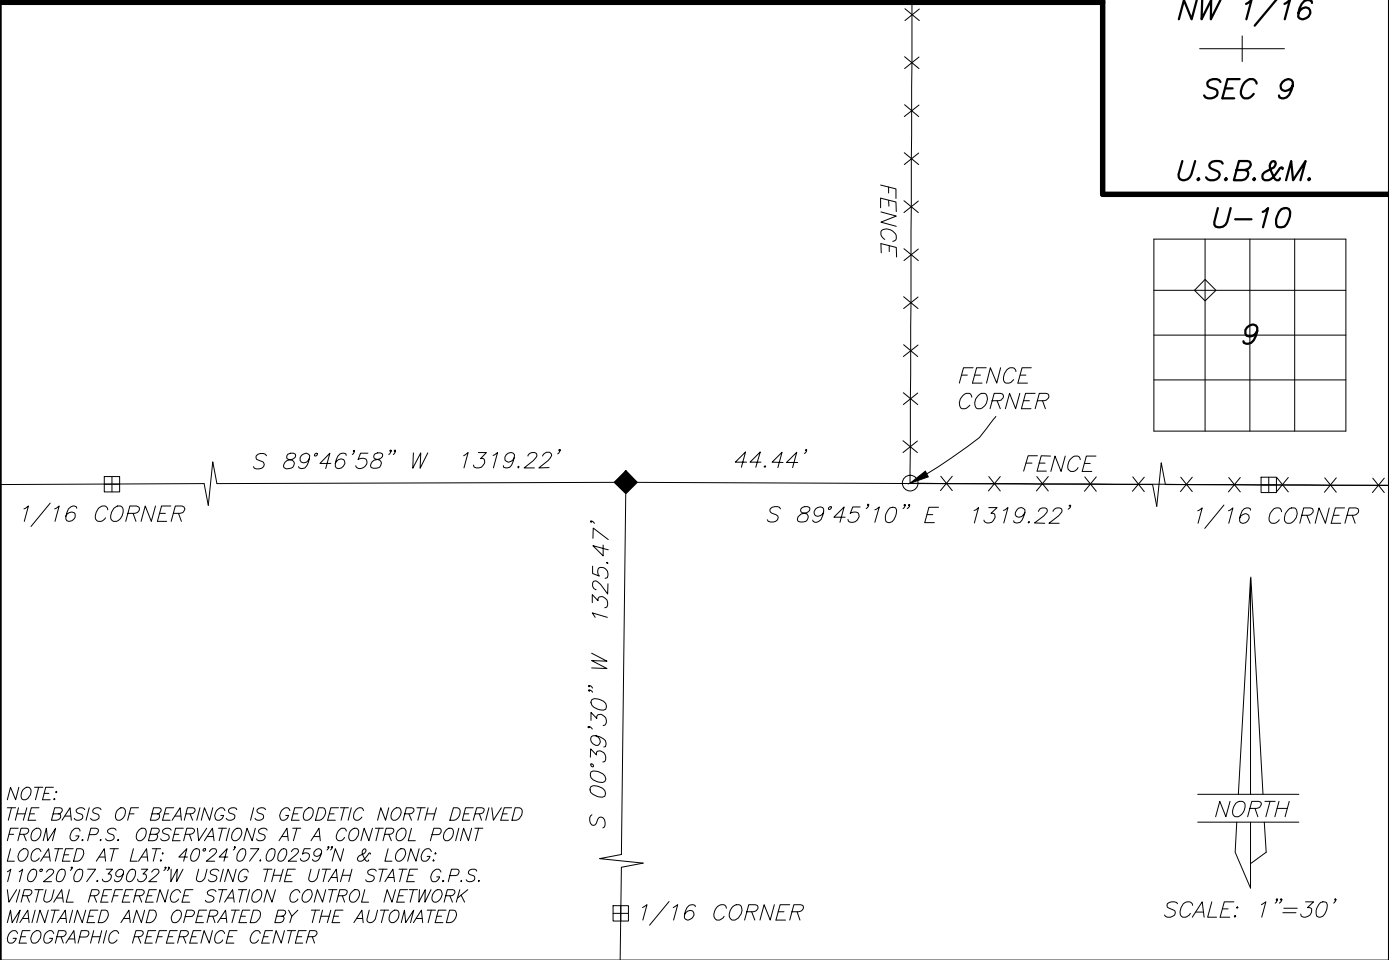

NOTE:
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED
FROM G.P.S. OBSERVATIONS AT A CONTROL POINT
LOCATED AT LAT: 40°24'07.00259"N & LONG:
110°20'07.39032"W USING THE UTAH STATE G.P.S.
VIRTUAL REFERENCE STATION CONTROL NETWORK
MAINTAINED AND OPERATED BY THE AUTOMATED
GEOGRAPHIC REFERENCE CENTER



SCALE: 1"=30'

DESCRIPTION OF CORNER EVIDENCE FOUND

POSITION OF CORNER WAS DETERMINED BY SINGLE PROPORTIONATE MEASUREMENT
BETWEEN SIXTEENTH CORNERS IN-LINE WITH AN EXISTING FENCE

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE
THE ORIGINAL LOCATION OF THE CORNER

SET 5/8" X 24" REBAR WITH ALUMINUM CAP STAMPED; PLS 148951 AT 1/16 CORNER
REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA
(U.S. SURVEY FEET)
NAD 83 UTAH CENTRAL ZONE
N: 7321234.20
E: 1961732.83

LATITUDE: 40°24'46.74029" N
LONGITUDE: 110°20'45.73868" W
PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300010S0040W0_320560

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do
hereby certify that I have performed or reviewed the work done on the
diagrammed corner as reported on this recordation form and approve same

Date 8 FEB '16

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

